





INSERT BEARING ECCENTRIC LOCK

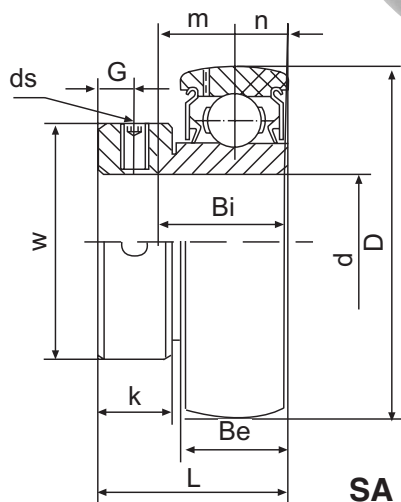

K-type Seal

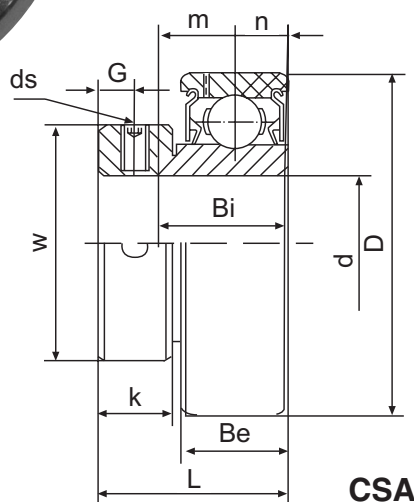

K-type Seal

Part Number	Part Number	Shaft Diameter (d)		Dimensions (in.) or (mm)											Basic Load Rating (Kg)	Basic Static Load Rating (Kg)	Weight (Kgs)
		(in.)	(mm)	D	Bi	Be	r	n	m	G	L	W	K	ds			
SA 201	CSA 201		12														0.11
202	202		15	40	19.1	12	0.8	6	13.1	5	28.6	28.6	13.5	M6x0.75			0.10
203	203		17														
SA 201-8	CSA 201-8	1/2													780	454	0.14
202-9	202-9	9/16															0.13
202-10	202-10	5/8		1.5748	0.7520	0.4724	0.0320	0.2362	0.5157	0.1969	1.1250	1.1250	0.5315	1/4-28			0.12
203-11	203-11	11/16															0.12
SA 204	CSA 204		20	47	21.5	14	1.5	7	14.5	5	31	33.3	13.5	M6x0.75	1010	630	0.16
SA 204-12	CSA 204-12	3/4		1.8504	0.8465	0.5512	0.0590	0.2756	0.5709	0.1969	1.2205	1.3110	0.5315	1/4-28			0.15
SA 205	CSA 205		25	52	21.5	15	1.5	7.5	14	5	31	38.1	13.5	M6x0.75			0.18
SA 205-14	CSA 205-14	7/8													1100	710	0.21
205-15	205-15	15/16		2.0472	0.8465	0.5906	0.0590	0.2953	0.5572	0.1969	1.2205	1.5000	0.5315	1/4-28			0.19
205-16	205-16	1															0.18
SA 206	CSA 206		30	62	23.8	16	1.5	8	15.8	6	35.7	44.5	15.9	M8x1			0.30
SA 206-17	CSA 206-17	1 1/16													1550	1020	0.34
206-18	206-18	1 1/8															0.32
206-19	206-19	1 3/16		2.4409	0.9370	0.6299	0.0590	0.3150	0.6220	0.2362	1.4055	1.7520	0.6260	5/16-24			0.30
206-20	206-20	1 1/4															0.29
SA 207	CSA 207		35	72	25.4	17	2	8.5	16.9	6.5	38.9	55.6	17.5	M8x1			0.50
SA 207-20	CSA 207-20	1 1/4													2030	1400	0.55
207-21	207-21	1 5/16															0.53
207-22	207-22	1 3/8		2.8346	1.0000	0.6693	0.0787	0.3346	0.6654	0.2559	1.5315	2.1890	0.6890	5/16-24			0.50
207-23	207-23	1 7/16															0.47
SA 208	CSA 208		40	80	30.2	18	2	9	21.2	6.5	43.7	60.3	18.3	M8x1			0.63
SA 208-24	CSA 208-24	1 1/2		3.1496	1.1890	0.7087	0.0787	0.3543	0.8346	0.2559	1.7205	2.3740	0.7205	5/16-24	2300	1600	0.67
208-25	208-25	1 9/16															0.65
SA 209	CSA 209		45	85	30.2	19	2	9.5	20.7	6.5	43.7	63.5	18.3	M8x1			0.66
SA 209-26	CSA 209-26	1 5/8													2570	1810	0.74
209-27	209-27	1 11/16		3.3465	1.1890	0.7480	0.0787	0.3740	0.8150	0.2559	1.7205	2.5000	0.7205	5/16-24			0.72
209-28	209-28	1 3/4															0.67
SA 210	CSA 210		50	90	30.2	20	2	10	20.2	6.5	43.7	69.9	18.3	M8x1			0.80
SA 210-29	CSA 210-29	1 13/16													2760	2010	0.90
210-30	210-30	1 7/8															0.86
210-31	210-31	1 15/16		3.5433	1.1890	0.2874	0.0787	0.3937	0.7953	0.2554	1.7205	2.7520	0.7205	5/16-24			0.83
210-32	210-32	2															0.79
SA 211	CSA 211		55	100	32.5	21	2.5	10.5	22	8	48.4	76.2	20.7	M10x1.25			0.77
SA 211-32	CSA 211-32	2													3400	2550	0.95
211-33	211-33	2 1/16															0.91
211-34	211-34	2 1/8		3.9370	1.2795	0.8270	0.0984	0.4134	0.86754	0.3150	1.9063	3	0.8150	3/8-24			0.86
211-35	211-35	2 3/16															0.81
SA 212	CSA 212		60	110	37.1	22	2.5	11	26.1	8	53.1	84.2	22.3	M10x1.25			0.99
SA 212-36	CSA 212-36	2 1/4		4.3310	1.4606	0.8660	0.0984	0.4330	1.0276	0.3150	2.0910	3.3150	0.8780	3/8-24	4100	3150	1.00
212-39	212-39	2 7/16															0.98

SA & CSA 200 SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555


E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com



INSERT BEARING WITH SNAP RING

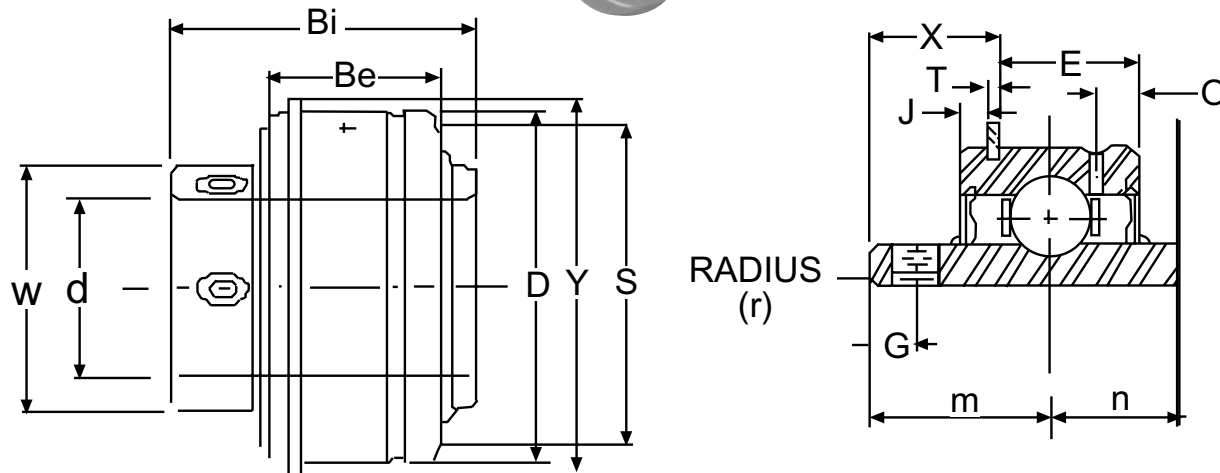

Part Number	Shaft Diameter (d)		Dimensions (mm)															Basic Dynamic Load (Kg)	Basic Static Load (Kg)	Weight (Kg)
	(in.)	(mm)	D	Bi	Be	n	m	E	W	O	T	J	G	S	r	Y	X			
ER 201	1/2 9/16 5/8 11/16 3/4	12	47	31	16	11.5	19.5	11.1	29	4	1.2	3.6	5	41.3	1	52.5	16.3	640	1000	0.25
ER 202		15																		
ER 203		17																		
ER 204		20																		
ER 8																				
ER 9																				
ER 10																				
ER 11																				
ER 12	3/4	1.8504	1.2205	0.6300	0.4528	0.7678	0.4370	1.1418	0.1575	0.0473	0.1418	0.1969	1.6260	0.0394	2.0670	0.6418				
ER 205	13/16 7/8 15/16 1	25	52	35	19	13.1	22	15	35	5	1.1	2.3	5.6	47	1	57	16	730	1100	0.31
ER 13			2.0473	1.3780	0.7481	0.5158	0.8662	0.5906	1.3780	0.1969	0.0433	0.0906	0.2205	1.8504	0.0394	2.2441	0.6300			
ER 14																				
ER 15																				
ER 16	1																			
ER 206	1 1/16 1 1/8 1 3/16	30	62	38	22	16	22	17	40	5.5	1.5	3	5.6	54	1	54	16	1050	1510	0.42
ER 17			2.4410	1.4961	0.8662	0.6300	0.8662	0.6693	1.5748	0.2166	0.0591	0.1182	0.2205	2.1260	0.0394	2.1260	0.6300			
ER 18																				
ER 19																				
ER 207	1 1/4 1 5/16 1 3/8 1 7/16	35	72	43	24	17	25.4	19	47	5.5	1.5	3	6	65	1	78	18	1420	2010	0.62
ER 20			2.8347	1.6930	0.9449	0.6693	1.0000	0.7481	1.8504	0.2166	0.0591	0.1182	0.2363	2.5591	0.0394	3.0709	0.7087			
ER 21																				
ER 22																				
ER 23																				
ER 208	1 1/2 1 9/16	40	80	49	28	19	30	23	52	6	1.5	3	8	71	1.6	86	21	1650	2290	0.91
ER 24			3.1496	1.9292	1.1024	0.7481	1.1811	0.9056	2.0473	0.2363	0.0591	0.1182	0.3150	2.7953	0.0630	3.3859	0.8268			
ER 25																				
ER 209	1 5/8 1 11/16 1 3/4	45	85	49	28	19	30	23	58	6	1.5	3	8	77	1.6	91	21	1880	2562	1.04
ER 26			3.3465	1.9292	1.1024	0.7481	1.1811	0.9056	2.2835	0.2363	0.0591	0.1182	0.3150	3.0315	0.0630	3.5827	0.8268			
ER 27																				
ER 28																				
ER 210	1 13/16 1 7/8 1 15/16	50	90	52	29	19	33	23	62	7.5	2.3	3	9.5	81	1.6	96	24	2110	2774	1.10
ER 29			3.5433	2.0473	1.1418	0.7481	1.2993	0.9056	2.4410	0.2953	0.0906	0.1182	0.3741	3.1890	0.0630	3.7796	0.9449			
ER 30																				
ER 31																				
ER 211	2 2 1/16 2 1/8 2 3/16	55	100	55.6	22	22	33	24.6	69	7.5	2.3	3	9.5	90	2	106	24	2650	3400	1.36
ER 32			3.9370	2.1890	0.8662	0.8662	1.2993	0.9685	2.7166	0.2953	0.0906	0.1182	0.3741	3.5433	0.0788	4.1733	0.9449			
ER 33																				
ER 34																				
ER 35																				

**ER
S
E
R
I
E
S**

MEYA BEARING CO., LIMITED



TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

INSERT BEARING WITH SNAP RING

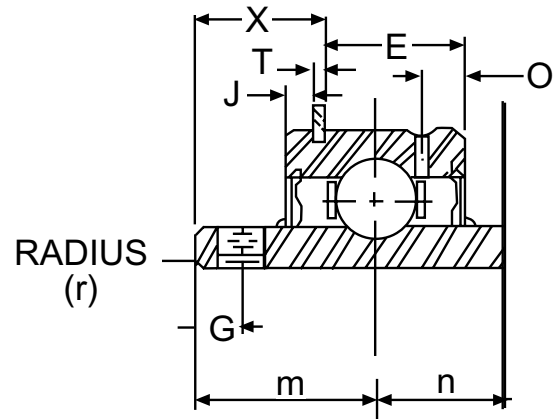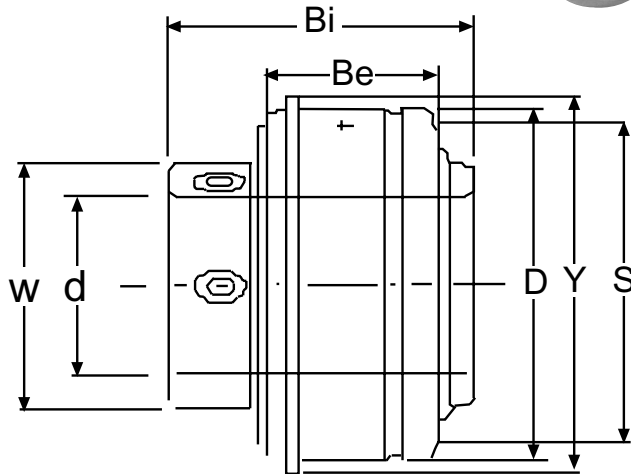

Part Number	Shaft Diameter (d)		Dimensions (mm)															Basic Dynamic Load (Kg)	Basic Static Load (Kg)	Weight (Kg)
	(in.)	(mm)	D	Bi	Be	n	m	E	W	O	T	J	G	S	r	Y	X			
ER 212		60	110	65	31.8	25.4	39.6	26	75	7.5	2.3	3	11	100	2	116	29	3280	4080	2.53
ER 36	2 1/4																			
ER 37	2 5/16																			
ER 38	2 3/8		4.3307	2.5591	1.2520	1.0000	1.5591	1.1024	2.9528	0.2953	0.0906	0.1182	0.4331	3.9370	0.0788	4.5670	1.1418			
ER 39	2 7/16																			
ER 213		65																3630	4490	2.89
ER 214		70	125	70	35	27	43	28	87	8	2.8	4	11	111	2	134	32			
ER 40	2 1/2																			
ER 41	2 9/16																			
ER 42	2 5/8																			
ER 43	2 11/16		4.9213	6.6930	1.3780	1.0630	1.6930	1.1024	3.4252	0.3150	0.1103	0.1575	0.4331	4.3701	0.8662	5.2756	1.2599	3990	4890	3.56
ER 44	2 3/4																			
ER 215		75	130	77.8	38	33	44	31	92	9.5	2.8	4	11	117	2	139	32			
ER 45	2 13/16																			
ER 46	2 7/8																			
ER 47	2 15/16		5.1182	3.0630	1.4961	1.2993	1.7323	1.2205	3.6221	0.3741	0.1103	0.1575	0.4331	4.6063	0.0788	5.4725	1.2599			
ER 48	3																			

ER
215
SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com



PILLOW BLOCK SET SCREW LOCK

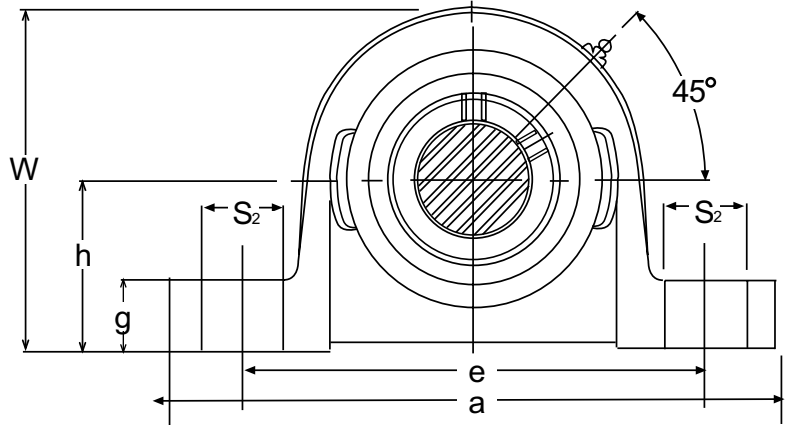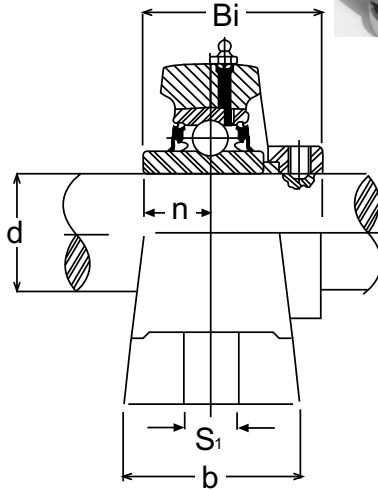

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	h	a	e	b	S2	S1	g	W	Bi	n	(in.)	(mm)	
UCP 201		12													
UCP 202		15													
UCP 203		17													
UCP 201-08	1/2												3/8	M10	1.32
UCP 202-09	9/16														
UCP 202-10	5/8														
UCP 203-11	11/16														
UCP 204		20													
UCP 204-12	3/4												3/8	M10	1.46
UCP 205		25													
UCP 205-13	13/16												3/8	M10	1.76
UCP 205-14	7/8														
UCP 205-15	15/16														
UCP 205-16	1														
UCP 206		30													
UCP 206-17	1 1/16												1/2	M14	2.64
UCP 206-18	1 1/8														
UCP 206-19	1 3/16														
UCP 206-20	1 1/4														
UCP 207		35													
UCP 207-20	1 1/4												1/2	M14	3.74
UCP 207-21	1 5/16														
UCP 207-22	1 3/8														
UCP 207-23	1 7/16														
UCP 208		40													
UCP 208-24	1 1/2												1/2	M14	4.62
UCP 208-25	1 9/16														
UCP 209		45													
UCP 209-26	1 5/8												1/2	M14	5.28
UCP 209-27	1 11/16														
UCP 209-28	1 3/4														
UCP 210		50													
UCP 210-29	1 13/16												5/8	M16	6.38
UCP 210-30	1 7/8														
UCP 210-31	1 15/16														
UCP 210-32	2														
UCP 211		55													
UCP 211-32	2												5/8	M16	8.14
UCP 211-33	2 1/16														
UCP 211-34	2 1/8														
UCP 211-35	2 3/16														

UCP 200 SERIES

MEYA BEARING CO., LIMITED




TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com

Pillow Block SET SCREW LOCK

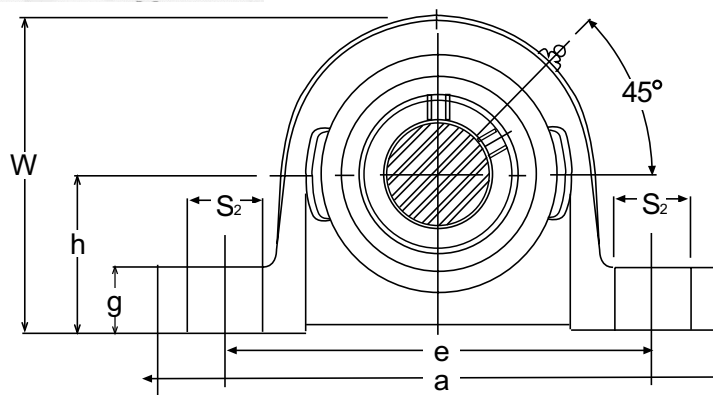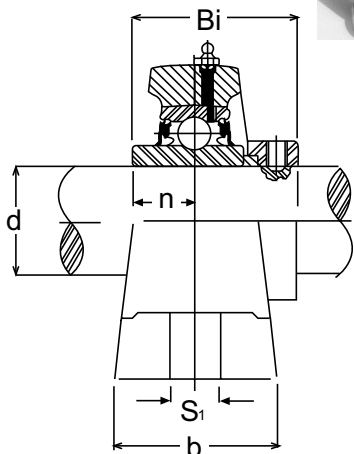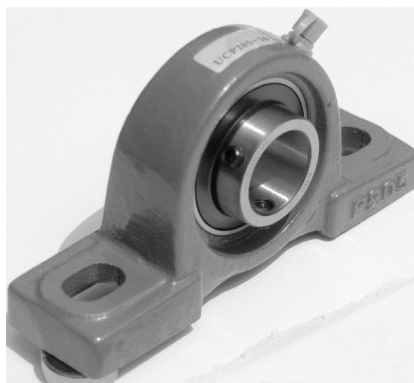

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	h	a	e	b	S2	S1	g	W	Bi	n	(in.)	(mm)	
UCP 212	2 1/4 2 5/16 2 3/8 2 7/16	60	69.8	241	184	70	25	20	25	138	65.1	25.4	5/8	M16	10.78
UCP 212-36															
UCP 212-37															
UCP 212-38															
UCP 212-39															
UCP 213	2 1/2 2 9/16	65	76.2	265	203	70	30	25	27	150	65.1	25.4	3/4	M20	12.98
UCP 213-40			3	10 7/16	8	2 3/4	1 3/16	1	1 1/16	5 29/32	2.5630	1.000			
UCP 213-41															
UCP 214	2 5/8 2 11/16 2 3/4	70	79.4	266	210	72	30	25	28	156	74.6	30.2	3/4	M20	14.52
UCP 214-42															
UCP 214-43															
UCP 214-44															
UCP 215	2 13/16 2 7/8 2 15/16 3	75	82.6	275	217	74	30	25	28	162	77.8	33.3	3/4	M20	16.06
UCP 215-45															
UCP 215-46															
UCP 215-47															
UCP 215-48															
UCP 216	3 1/8	80	88.9	292	232	78	30	25	32	174.9	82.6	33.3	3/4	M20	22.00
UCP 216-50			3 1/2	11 1/2	9 1/8	3 1/16	1 3/16	1	1 1/4	6 57/64	3.2520	1.3110			
UCP 217	3 1/4	85	95.2	310	247	83	30	25	32	187	85.7	34.1	3/4	M20	24.64
UCP 217-52			3 3/34	12 17/32	9 23/32	3 9/32	1 3/16	1	1 1/4	7 23/64	3.3740	1.3425			
UCP 218															
UCP 218-56	3 1/2	90	101.6	327	262	88	35	27	34	200	96.0	39.7	M22		31.90
			4	12 7/8	10 5/16	3 15/32	1 3/8	1 1/16	1 11/32	7 7/8	3.7795	1.5630	7/8		

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com


Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com

UCP 200 SERIES



TAPPED BASE PILLOW BLOCK

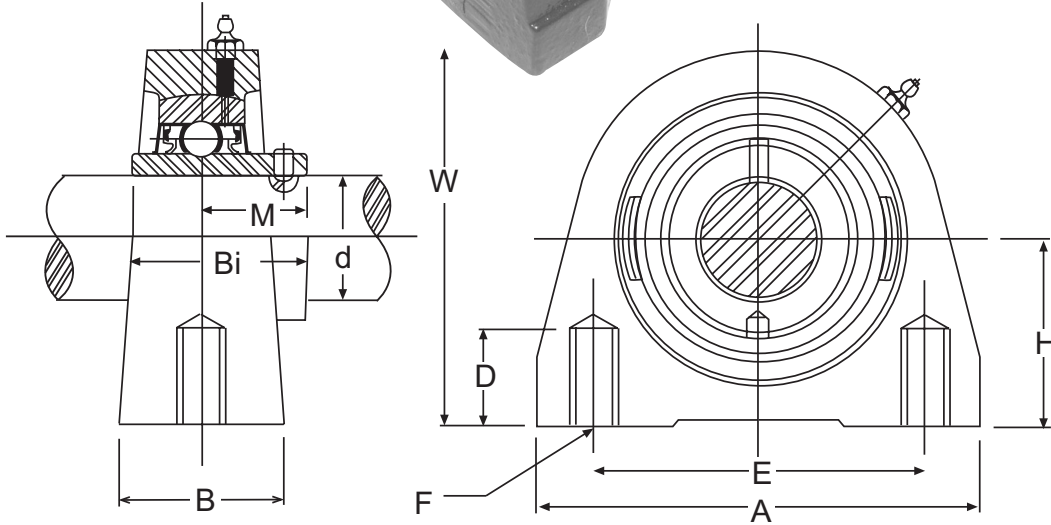

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)									Weight Lbs.
	(in.)	(mm)	H	A	E	B	W	F-Tapped Holes	D-Min Tap Depth	M	Bi	
UCPA 203	1/2	17	33.3	73	50.8	38	65	UNC	13	18.3	31.0	1.4
UCPA 204		20										
UCPA 201-08												
UCPA 202-10												
UCPA 204-12	3/4		1 5/16	2 7/8	2	1 1/2	2 9/16	3/8"-16	1/2	0.7205	1.2205	
UCPA 205	7/8	25	36.5	76	50.8	38	71	UNC	13	19.7	34.0	1.6
UCPA 205-14												
UCPA 205-15												
UCPA 205-16												
UCPA 206	1 1/16	30	42.9	102	76.2	38	86	UNC	16	22.2	38.1	2.6
UCPA 206-17												
UCPA 206-18												
UCPA 206-19												
UCPA 206-20	1 1/4S		1 11/16	4	3	1 1/2	3 3/8	7/16"-14	5/8	0.8740	1.5000	
UCPA 207	1 1/4	35	47.6	108	82.6	48	95	UNC	19	25.4	42.9	3.6
UCPA 207-20												
UCPA 207-21												
UCPA 207-22												
UCPA 207-23	1 7/16		1 7/8	4 1/4	3 1/4	1 7/8	3 3/4	1/2"-13	3/4	1.0000	1.6890	
UCPA 208	1 1/2	40	49.2	117	88.9	48	100	UNC	19	30.2	49.2	4.0
UCPA 208-24												
UCPA 208-25												
UCPA 209	1 5/8	45	54.0	127	95.3	51	108	UNC	19	30.2	49.2	5.0
UCPA 209-26												
UCPA 209-27												
UCPA 209-28												
UCPA 210	1 7/8	50	57.2	140	101.6	51	117	UNC	22	32.6	51.6	5.9
UCPA 210-30												
UCPA 210-31												
UCPA 210-32												

UCBA 200 SERIES

MEYA BEARING CO., LIMITED



TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

Two Bolt FLANGE UNIT SET SCREW LOCK

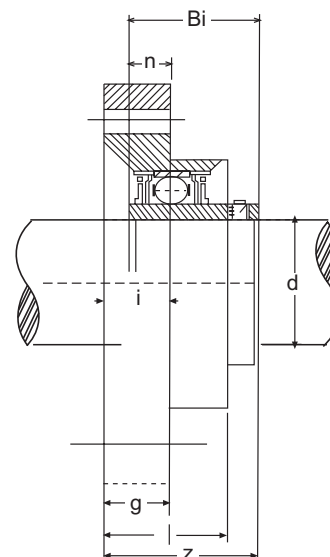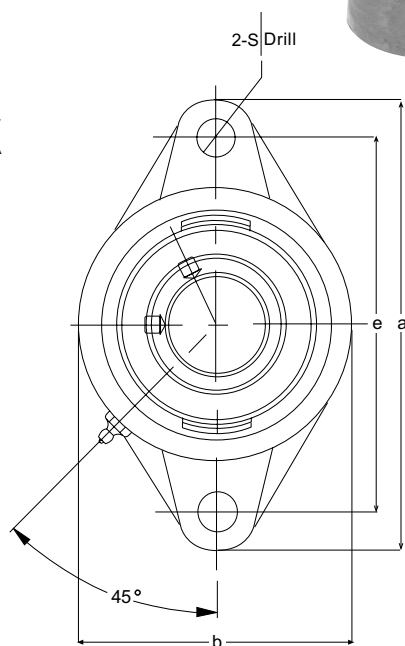

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(in.)	(mm)	
UCFLW 201-08	1/2		4 13/32	3	43/64	7/16	31/32	25/64	2 3/8	1 5/16	1.0236	.3937	5/16		.9
UCFLW 202-10	5/8														
UCFL 201		12													
UCFL 202		15													
UCFL 203		17													
UCFL 204		20													
UCFL 201-08	1/2														
UCFL 202-09	9/16														
UCFL 202-10	5/8														
UCFL 203-11	11/16		4 29/64	3 35/64	19/32	7/16	1	15/32	2 23/64	1 5/16	1.2205	0.5000			
UCFL 204-12	3/4														
UCFL 205		25	130	99	16	13	27	16	68	35.8	34.1	14.3		M14	
UCFL 205-14	7/8														
UCFL 205-15	15/16		5 1/8	3 57/64	5/8	33/64	1 1/16	5/8	2 43/64	1 13/32	1.3425	0.5630	1/2		1.39
UCFL 205-16	1														
UCFL 206		30	148	117	18	13	31	16	80	40.2	38.1	15.9		M14	
UCFL 206-18	1 1/8		5 53/64	4 39/64	45/64	33/64	1 7/32	5/8	3 5/32	1 37/64	1.5000	0.6260	1/2		1.87
UCFL 206-19	1 3/16														
UCFL 207		35	161	130	19	16	34	16	90	44.4	42.9	17.5		M14	
UCFL 207-20	1 1/4														
UCFL 207-21	1 5/16														
UCFL 207-22	1 3/8		6 11/32	5 1/8	3/4	5/8	1 11/32	5/8	3 35/64	1 3/4	1.6890	0.6890	1/2		2.64
UCFL 207-23	1 7/16														
UCFL 208		40	175	144	21	16	36	16	100	51.2	49.2	19		M14	
UCFL 208-24	1 1/2		6 57/64	5 43/64	53/64	5/8	1 27/64	5/8	3 15/16	2 1/64	1.9370	0.7480	1/2		3.52
UCFL 208-25	1 9/16														
UCFL 209		45	188	148	22	16	38	19	108	52.2	49.2	19		M14	
UCFL 209-26	1 5/8														
UCFL 209-27	1 11/16		7 13/32	5 53/64	55/64	5/8	1 1/2	3/4	4 1/4	2 1/16	1.9370	0.7480	1/2		4.18
UCFL 209-28	1 3/4														
UCFL 210		50	197	157	22	16	40	19	115	54.6	51.6	19		M16	
UCFL 210-30	1 7/8		7 3/4	6 3/16	55/64	5/8	1 37/64	3/4	4 17/32	2 5/32	2.0135	0.7480	1/2		5.06
UCFL 210-31	1 15/16														
UCFL 211		55	224	184	25	18	43	19	130	58.4	55.6	22.2		M16	
UCFL 211-32	1														
UCFL 211-34	2 1/8		8 13/16	7 1/4	63/64	45/64	1 11/16	3/4	5 1/8	2 19/64	2.1890	0.8740	5/8		7.26
UCFL 211-35	2 3/16														

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com



Two Bolt FLANGE UNIT SET SCREW LOCK

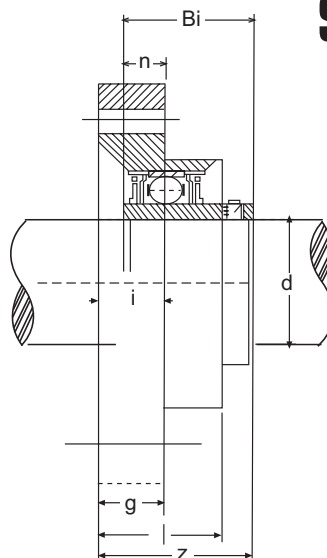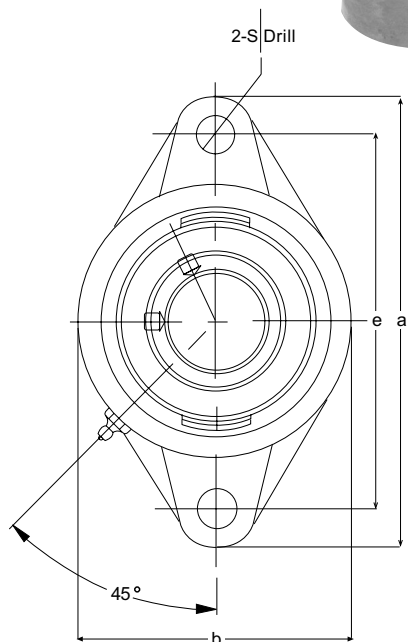

Part Number	Shaft Diameter (d)		Dimensions (in.) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(in.)	(mm)	
UCFL 212		60	250	202	29	18	48	23	140	68.7	65.1	25.4		M16	9.46
UCFL 212-36	2 1/4														
UCFL 212-38	2 3/8		9 27/32	7 61/64	1 9/64	45/64	1 57/64	29/32	5 33/64	2 45/64	2.5630	1.000	5/8		
UCFL 212-39	2 7/16														
UCFL 213		65	258	210	30	20	50	23	155	69.7	65.1	25.4		M20	11.44
UCFL 213-40	2 1/2		10 5/32	8 17/64	1 3/16	25/32	1 31/32	29/32	6 7/64	2 3/4	2.5630	1.000	3/4		
UCFL 214		70	265	216	31	20	54	23	160	75.4	74.6	30.2		M20	12.54
UCFL 214-44	2 3/4		10 7/16	8 1/2	1 7/32	25/32	2 1/8	29/32	6 19/64	2 31/32	2.9370	1.1890	3/4		
UCFL 215		75	275	225	34	20	56	23	165	78.5	77.8	33.3		M20	14.08
UCFL 215-48	3		10 53/64	8 55/64	1 11/32	25/32	2 13/64	29/32	6 1/2	3 3/32	3.0630	1.3110	3/4		
UCFL 216		80	290	233	34	20	58	25	180	83.3	82.6	33.3		M22	18.35
UCFL 216-50	3 1/8		11 27/64	9 11/64	1 11/32	25/32	2 9/32	63/64	7 3/32	3 9/32	3.2520	1.3110	7/8		
UCFL 217		85	305	248	36	22	63	25	190	87.6	85.7	34.1		M22	21.56
UCFL 217-52	3 1/4		12	9 49/64	1 27/64	7/8	2 31/64	63/64	7 31/64	3 29/64	3.3740	1.3425	7/8		
UCFL 218		90	320	265	40	23	68	25	205	96.3	96	39.7		M22	26.62
UCFL 218-56	3 1/2		12 19/32	10 7/16	1 37/64	29/32	2 43/64	63/64	8 5/64	3 51/64	3.7795	1.5630	7/8		

UCFL / UCFLW 200 SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555


E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>



FOUR BOLT FLANGE UNIT SET SCREW LOCK

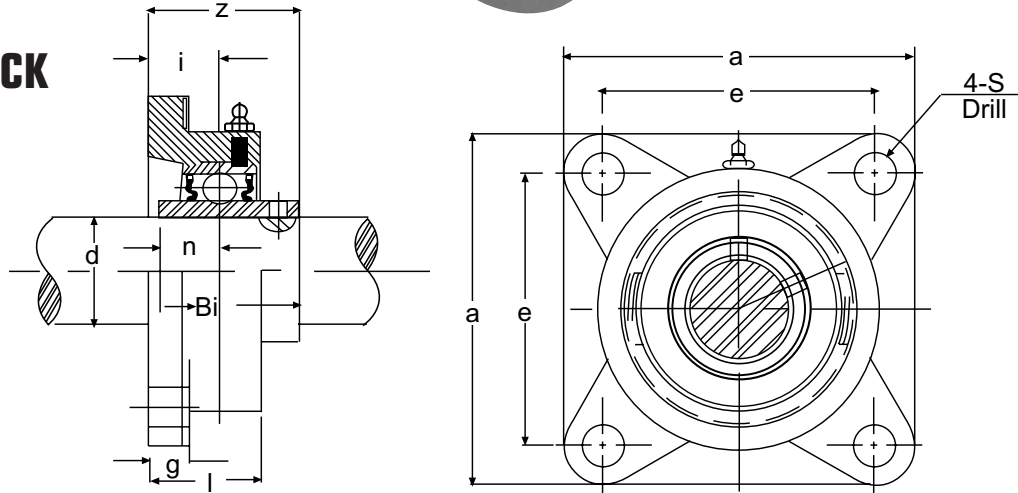

Part Number	Shaft Diameter (d)		Dimensions (in.) or (mm)									Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(in.)	(mm)	
UCF 201	1/2	12	86	64	15	11	25	12	33.3	31	12.7	3/8	M10	1.32
UCF 202		15												
UCF 203		17												
UCF 204		20												
UCF 201-08		9/16												
UCF 202-09		5/8												
UCF 202-10		11/16												
UCF 203-11		3/4												
UCF 204-12	3/4		3 3/8	2 1/2	19/32	7/16	1	15/32	1 5/16	1.2205	0.5000			
UCF 205	13/16	25	95	70	16	13	27	12	35.8	34.1	14.3	3/8	M10	1.90
UCF 205-13		7/8												
UCF 205-14		15/16												
UCF 205-15		1	3 3/4	2 3/4	5/8	1/2	1 1/16	15/32	1 13/32	1.3425	0.5630			
UCF 205-16														
UCF 206	1 1/16	30	108	83	18	13	31	12	40.2	38.1	15.9	3/8	M10	3.52
UCF 206-17		1 1/8												
UCF 206-18		1 3/16												
UCF 206-19		1 1/4	4 1/4	3 1/4	45/64	1/2	1 7/32	15/32	1 19/32	1.5000	0.6260			
UCF 206-20														
UCF 207	1 1/4	35	117	92	19	15	34	14	44.4	42.9	17.5	7/16	M12	3.52
UCF 207-20		1 5/16												
UCF 207-21		1 3/8												
UCF 207-22		1 7/16	4 19/32	3 5/8	3/4	19/32	1 11/32	35/64	1 3/4	1.6890	0.6890			
UCF 207-23														
UCF 208	1 1/2	40	130	102	21	15	36	16	51.2	49.2	19	1/2	M14	4.18
UCF 208-24		1 9/16	5 1/8	4 1/64	13/16	19/32	1 13/32	5/8	2 1/64	1.9370	0.7480			
UCF 208-25														
UCF 209	1 5/8	45	137	105	22	16	38	16	52.2	49.2	19	1/2	M14	5.28
UCF 209-26		1 11/16												
UCF 209-27		1 3/4	5 13/32	4 1/8	55/64	5/8	1 1/2	5/8	2 1/16	1.9370	0.7480			
UCF 209-28														
UCF 210														
UCF 210-29	1 13/16	50	143	111	22	16	40	16	54.6	51.6	19	1/2	M14	5.72
UCF 210-30		1 7/8												
UCF 210-31		1 15/16	5 5/8	4 3/8	55/64	5/8	1 9/16	5/8	2 5/32	2.0315	0.7480			
UCF 210-32		2												
UCF 211														
UCF 211-32	2	55	162	130	25	18	43	19	58.4	55.6	22.2	5/8	M16	7.70
UCF 211-33		2 1/16												
UCF 211-34		2 1/8	6 3/8	5 1/8	63/64	23/32	1 11/16	3/4	2 5/16	2.1890	0.8740			
UCF 211-35		2 3/16												

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com


Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com

UCF 200 SERIES



FOUR BOLT FLANGE UNIT SET SCREW LOCK

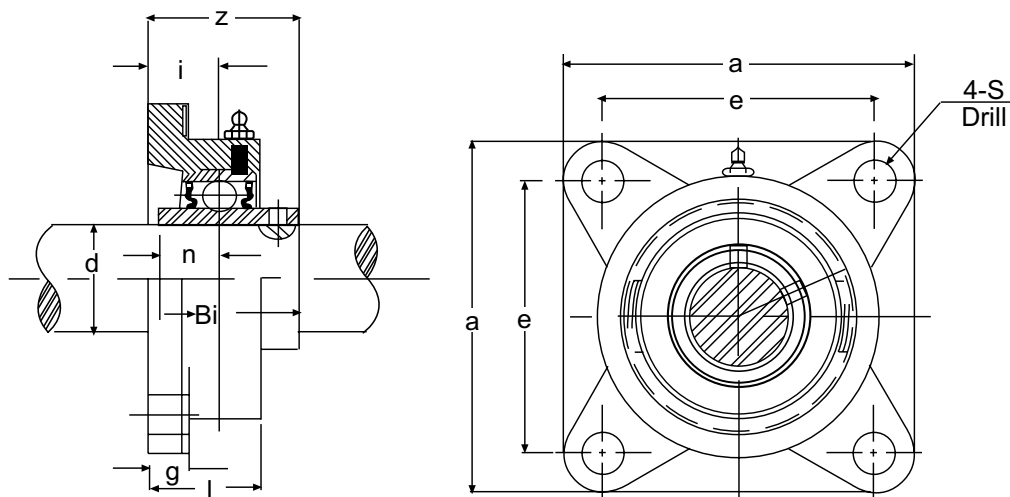

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(in.)	(mm)		
UCF 212	2 1/4 2 5/16 2 3/8 2 7/16	60	175	143	29	18	48	19	68.7	65.1	25.4	5/8	M16	9.24	
UCF 212-36															
UCF 212-37															
UCF 212-38															
UCF 212-39			6 7/8	5 5/8	1 9/64	23/32	1 7/8	3/4	2 23/32	2.5630	1.000				
UCF 213	2 1/2 2 9/16	65	187	149	30	22	50	19	69.7	65.1	25.4	5/8	M16	11.66	
UCF 213-40															
UCF 213-41															
UCF 214	2 5/8 2 11/16 2 3/4	70	193	152	31	22	54	19	75.4	74.6	30.2	5/8	M16	12.10	
UCF 214-42															
UCF 214-43															
UCF 214-44															
UCF 215	2 13/16 2 7/8 2 15/16 3	75	200	159	34	22	56	19	78.5	77.8	33.3	5/8	M16	13.64	
UCF 215-45															
UCF 215-46															
UCF 215-47															
UCF 215-48															
UCF 216	3 1/8	80	208	165	34	22	58	23	83.3	82.6	33.3	3/4	M20	16.94	
UCF 216-50															
UCF 217	3 1/4	85	220	175	36	24	63	23	87.6	85.7	34.1	3/4	M20	19.80	
UCF 217-52															
UCF 218	3 1/2	90	235	187	40	24	68	23	96.3	96.0	39.7	3/4	M20	24.86	
UCF 218-56															

UCF 200 SERIES

MEYA BEARING CO., LIMITED



TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

Two Bolt Pillow Block Eccentric Lock

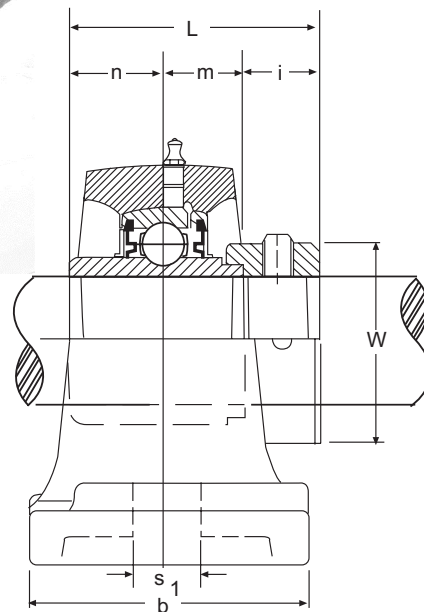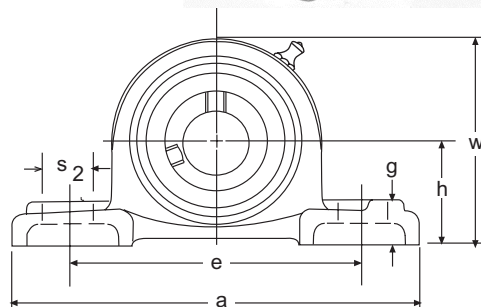

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)													Bolt Used	Weight Lbs.
	(in.)	(mm)	h	a	e	b	s ₁	s ₂	g	w	L	n	m	i	W	(in.)	
HCP 201-12mm		12															1.40
HCP 202-15mm		15															1.38
HCP 203-17mm		17															1.37
HCP 201-08	1/2															3/8	1.41
HCP 202-09	9/16																1.39
HCP 202-10	5/8		1 3/16	5	3 3/4	1 1/2	1/2	3/4	21/32	2 15/32	1.7126	.6693	.6693	.3740	1.260		1.39
HCP 203-11	11/16																1.37
HCP 204-20mm		20															1.50
HCP 204-12	3/4		33.33 1 5/16	127.0 5	95.3 3 3/4	38.1 1 1/2	12.7 1/2	19 3/4	15.1 19/32	63.1 2 31/64	43.5 1.7126	17.0 .6693	17.0 .6693	9.5 .3740	32.0 1.260	3/8	1.60
HCP 205-25mm		25															1.71
HCP 205-13	13/16																1.83
HCP 205-14	7/8																1.81
HCP 205-15	15/16		1 7/16	5 1/2	4 1/8	1 1/2	1/2	3/4	19/32	2 25/32	1.7441	.6850	.6850	.3740	1.500		1.76
HCP 205-16	1																1.74
HCP 206-30mm		30															2.70
HCP 206-17	1 1/16																2.98
HCP 206-18	1 1/8																2.84
HCP 206-19	1 3/16		1 11/16	6 1/2	4 3/4	1 7/8	21/32	13/16	11/16	3 5/16	1.9016	.7165	.7165	.4685	1.7504	1/2	2.76
HCP 206-20	1 1/4 (s)																2.73
HCP 207-35mm		35															3.37
HCP 207-20	1 1/4		47.63	166.7	127.0	47.6	16.6	20.6	19.0	92.9	51.1	18.8	18.8	13.5	55.6	1/2	3.57
HCP 207-21	1 5/16																3.53
HCP 207-22	1 3/8		1 7/8	6 9/16	5	1 7/8	21/32	13/16	3/4	3 21/32	2.0118	.7402	.7402	.5314	2.1900		3.46
HCP 207-23	1 7/16																3.40
HCP 208-40mm		40															4.37
HCP 208-24	1 1/2		1 15/16	7 1/4	5 13/32	2 1/8	21/32	13/16	25/32	3 27/32	2.2165	.8425	.8425	.5315	2.3740	1/2	4.50
HCP 208-25	1 9/16																4.41
HCP 209-45mm		45															5.00
HCP 209-26	1 5/8																5.25
HCP 209-27	1 11/16		2 1/8	7 15/32	5 3/4	2 1/8	21/32	13/16	15/16	4 3/16	2.2165	.8425	.8425	.5315	2.5000	1/2	5.16
HCP 209-28	1 3/4																5.07
HCP 210-50mm		50															5.83
HCP 210-29	1 13/16		57.15	206.4	158.8	60.3	19.8	22.2	25.4	112.7	62.7	24.6	24.6	13.5	69.9		6.20
HCP 210-30	1 7/8																6.11
HCP 210-31	1 15/16		2 1/4	8 1/8	6 1/4	2 3/8	25/32	7/8	1	4 7/16	2.4688	.9685	.9685	.5315	2.7500	5/8	6.00
HCP 210-32	2 (s)																5.91
HCP 211-55mm		55															7.00
HCP 211-32	2		63.50	219.1	170.7	60.3	19.8	22.2	22.2	124.6	71.4	27.7	27.7	16.0	76.2		7.63
HCP 211-33	2 1/16																7.39
HCP 211-34	2 1/8		2 1/2	8 5/8	6 23/32	2 3/8	25/32	7/8	7/8	4 29/32	2.8110	1.090	1.0906	.6298	3.0000	5/8	7.25
HCP 211-35	2 3/16																7.11

MEYA BEARING CO., LIMITED


TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com



Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com

HCP 200 SERIES

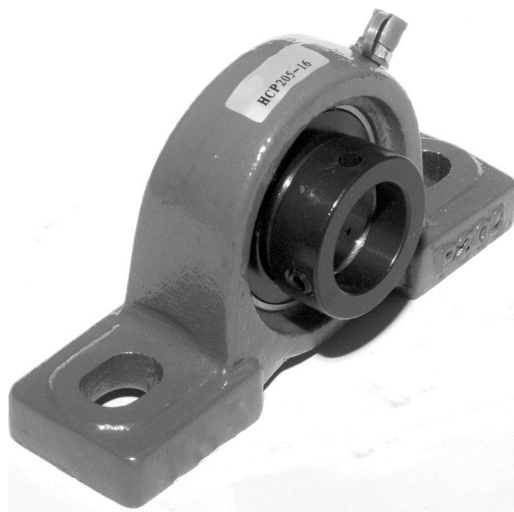

Two Bolt Pillow Block Eccentric Lock

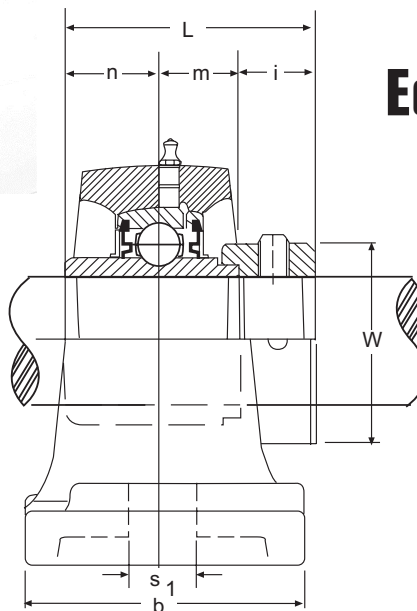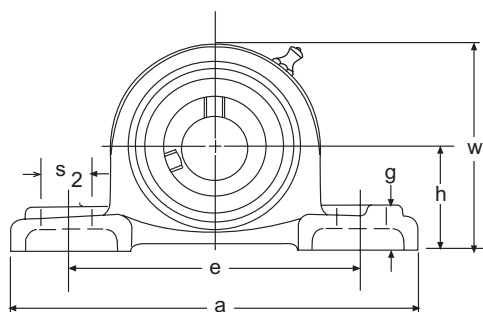

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)													Bolt Used (in.)	Weight Lbs.
	(in.)	(mm)	h	a	e	b	s ₁	s ₂	g	w	L	n	m	i	W		
HCP 212-60mm		60	69.85	241.3	184.2	69.9	19.8	25.4	25.4	138.1	77.8	30.9	30.9	16.0	84.1	5/8	10.01
HCP 212-36	2 1/4																10.67
HCP 212-37	2 5/16																10.44
HCP 212-38	2 3/8																10.34
HCP 212-39	2 7/16																10.19
HCP 213-65mm		65	76.20	265.1	203.2	71.8	25.4	30.2	26.9	150.0	85.7	34.1	34.1	17.5	86.0	3/4	12.03
HCP 213-40	2 1/2		3	10 7/16	8	2 53/64	1	1 3/16	1 1/16	5 29/32	3.3740	1.3425	1.3425	.6890	3.3860		12.48
HCP 213-41	2 9/16																12.25
HCP 214-70mm		70	79.38	265.9	210.3	72.2	25.4	30.2	32.9	156.4	85.7	34.1	34.1	17.5	90.0	3/4	15.85
HCP 214-42	2 5/8																16.80
HCP 214-43	2 11/16		3 1/8	10 15/32	8 9/32	2 27/32	1	1 3/16	1 1/8	6 5/32	3.3740	1.3425	1.3425	.6890	3.5433		16.42
HCP 214-44	2 3/4																16.07
HCP 215-75mm		75	82.55	264.3	216.7	73.8	25.4	30.2	28.6	161.9	92.1	37.3	37.3	17.5	101.6	3/4	16.40
HCP 215-45	2 13/16																18.30
HCP 215-46	2 7/8																17.60
HCP 215-47	2 15/16		3 1/4	10 13/16	8 17/32	2 29/32	1	1 3/16	1 1/8	6 3/8	3.6260	1.4685	1.4685	.6890	4.0000		17.40
HCP 215-48	3																17.00

HCP 200 SERIES

MEYA BEARING CO., LIMITED



TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com

Two Bolt Pillow Block Eccentric Lock Low Base

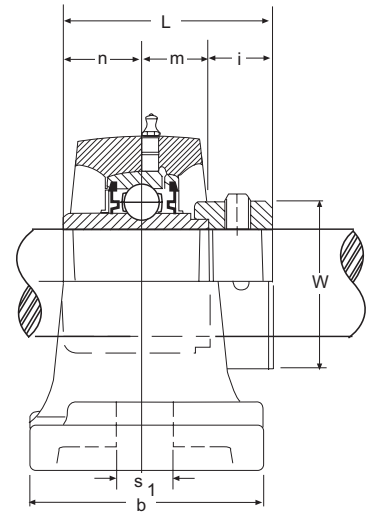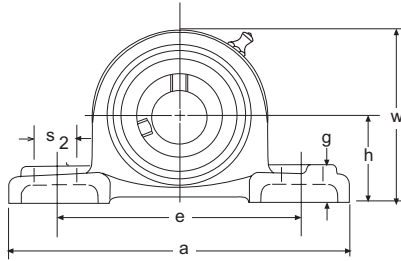

HCLP 200 SERIES

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)													Bolt Used	Weight Lbs.
	(in.)	(mm)	h	a	e	b	s ₁	s ₂	g	w	L	n	m	i	W	(in.)	
HCLP201-12mm	1/2 9/16 5/8 11/16	12	31.75	127.0	95.3	38.1	11.1	15.9	14.3	64.3	43.5	17.0	17.0	9.5	32.0	3/8	1.6
HCLP202-15mm		15															
HCLP203-17mm		17															
HCLP 201-08																	
HCLP 202-09																	
HCLP 202-10																	
HCLP 203-11																	
HCLP204-20mm	3/4	20	31.75	127.0	95.3	38.1	11.1	15.9	14.3	64.3	43.5	17.0	17.0	9.5	32.0	3/8	1.6
HCLP 204-12			1 1/4	5	3 3/4	1 1/2	7/16	5/8	9/16	2 17/32	1.7126	.6693	.6693	.3740	1.260		
HCLP205-25mm	13/16 7/8 15/16 1	25	33.34	139.7	104.8	38.1	12.7	19.0	15.9	68.3	44.3	17.4	17.4	9.5	38.1	3/8	2.1
HCLP 205-13			1 5/16	5 1/2	4 1/8	1 1/2	1/2	3/4	5/8	2 11/16	1.7441	.6850	.6850	.3740	1 1/2		
HCLP 205-14																	
HCLP 205-15																	
HCLP 205-16																	
HCLP206-30mm	1 1/16 1 1/8 1 3/16 1 1/4 (s)	30	39.69	165.1	120.7	47.6	15.1	20.6	18.3	80.9	48.3	18.2	18.2	11.9	44.5	1/2	2.9
HCLP 206-17			1 9/16	6 1/2	4 3/4	1 7/8	19/32	13/16	23/32	3 3/16	1.9016	.7165	.7165	.4685	1 3/4		
HCLP 206-18																	
HCLP 206-19																	
HCLP 206-20																	
HCLP207-35mm	1 1/4 1 5/16 1 3/8 1 7/16	35	46.04	177.8	136.5	47.6	15.1	22.2	19.1	93.7	51.1	18.8	18.8	13.5	55.6	1/2	4.2
HCLP 207-20			1 13/16	7	5 3/8	1 7/8	19/32	7/8	3/4	3 11/16	2.0118	.7402	.7402	.5314	2.190		
HCLP 207-21																	
HCLP 207-22																	
HCLP 207-23																	
HCLP208-40mm	1 1/2 1 9/16	40	49.21	184.2	137.3	53.9	16.7	20.6	19.0	97.6	56.3	21.4	21.4	13.5	60.4	1/2	4.9
HCLP 208-24			1 15/16	7 1/4	5 13/32	2 1/8	21/32	13/16	3/4	3 27/32	2.2165	.8425	.8425	.5315	2.377		
HCLP 208-25																	
HCLP209-45mm	1 5/8 1 11/16 1 3/4	45	52.38	196.9	152.0	54.8	15.1	25.0	23.0	105.9	56.3	21.4	21.4	13.5	63.5	1/2	6.2
HCLP 209-26			2 1/16	7 3/4	5 3/4	2 5/32	19/32	63/64	29/32	4 11/64	2.2165	.8425	.8425	.5315	2 1/2		
HCLP 209-27																	
HCLP 209-28																	
HCLP210-50mm	1 13/16 1 7/8 1 15/16 2 (s)	50	55.56	212.7	165.1	57.9	15.1	25.0	23.0	112.7	62.7	24.6	24.6	13.5	69.9	1/2	6.8
HCLP 210-29			2 3/16	8 3/8	6 1/2	2 9/32	19/32	63/64	29/32	4 7/16	2.4688	.9685	.9685	.5315	2 3/4		
HCLP 210-30																	
HCLP 210-31																	
HCLP 210-32																	
HCLP211-55mm	2 2 1/16 2 1/8 2 3/16	55	61.91	234.9	180.9	69.5	19.1	28.6	23.8	125.0	71.4	27.7	27.7	16.0	76.2	5/8	11.7
HCLP 211-32			2 7/16	9 1/4	7 1/8	2 47/64	3/4	1 1/8	15/16	4 59/64	2.8110	1.0906	1.0906	.6298	3		
HCLP 211-33																	
HCLP 211-34																	
HCLP 211-35																	
HCLP212-60mm	2 1/4 2 5/16 2 3/8 2 7/16	60	68.26	247.7	193.7	69.9	19.1	28.6	28.6	138.1	77.8	30.9	30.9	16.0	84.1	5/8	11.7
HCLP 212-36			2 11/16	9 3/4	7 5/8	2 3/4	3/4	1 1/8	1 1/8	5 7/16	3.0630	1.2165	1.2165	.6300	3 5/16		
HCLP 212-37																	
HCLP 212-38																	
HCLP 212-39																	
HCLP213-65mm	2 1/2 2 9/16	65	68.26	247.7	193.7	69.9	19.1	30.2	26.9	138.1	85.7	34.1	34.1	17.5	86.0	3/4	14.1
HCLP 213-40			2 11/16	9 3/4	7 5/8	2 3/4	3/4	1 3/16	1 1/16	5 7/16	3.3740	1.3425	1.3425	.6890	3.3858		
HCLP 213-41																	

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: http://www.meyabearing.com



Two Bolt FLANGE UNIT ECCENTRIC LOCK

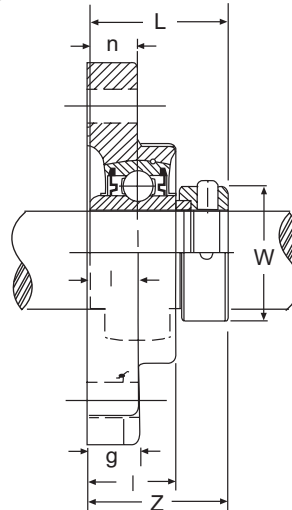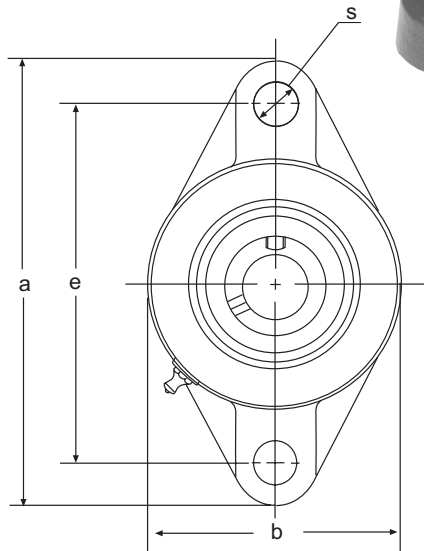

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)											Bolt Used	Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s2	b	Z	L	n	W	(in.)	
HCFTS 201-12mm		12													
HCFTS 202-15mm		15													
HCFTS 203-17mm		17													
HCFTS 201-08	1/2													3/8	1.40
HCFTS 202-09	9/16														
HCFTS 202-10	5/8		4 13/32	3 17/32	.75	7/16	1 1/4	13/32	2 3/8	1 51/64	1.7126	.6693	1.2600		
HCFTS 203-11	11/16														
HCFTS 204-20mm		20													
HCFTS 204-12	3/4		4 13/32	3 17/32	.75	7/16	1 1/4	13/32	2 3/8	1 51/64	1.7126	.6693	1.2600	3/8	1.40
HCFTS 205-25mm		25													
HCFTS 205-13	13/16														
HCFTS 205-14	7/8														
HCFTS 205-15	15/16		4 7/8	3 57/64	.75	17/32	1 5/16	1/2	2 3/4	1 13/16	1.7441	.685	1.5000	3/8	2.00
HCFTS 205-16	1														
HCFTS 206-30mm		30													
HCFTS 206-17	1 1/16														
HCFTS 206-18	1 1/8														
HCFTS 206-19	1 3/16		5 9/16	4 19/32	.826	17/32	1 3/8	1/2	3 1/8	2	1.9016	.7165	1.7500	3/8	2.50
HCFTS 206-20	1 1/4 (s)														
HCFTS 207-35mm		35													
HCFTS 207-20	1 1/4														
HCFTS 207-21	1 5/16														
HCFTS 207-22	1 3/8		6 1/8	5 1/8	.906	9/16	1 15/32	35/64	3 5/8	2 11/64	2.0118	.7402	2.1900	1/2	3.50
HCFTS 207-23	1 7/16														
HCFTS 208-40mm		40													
HCFTS 208-24	1 1/2		171.5	143.7	25.4	14.3	38.9	13.9	104.8	60.3	56.3	21.4	60.3		
HCFTS 208-25	1 9/16		6 3/4	5 21/32	1	9/16	1 17/32	35/64	4 1/8	2 3/8	2.2165	.8425	2.3740	7/16	4.40
HCFTS 209-45mm		45													
HCFTS 209-26	1 5/8		179.4	148.4	25.4	14.3	44.5	15.9	111.1	60.3	56.3	21.4	63.5		
HCFTS 209-27	1 11/16		7 1/16	5 27/32	1	9/16	1 3/4	5/8	4 3/8	2 3/8	2.2165	.8425	2.5000	1/2	5.10
HCFTS 209-28	1 3/4														
HCFTS 210-50mm		50													
HCFTS 210-29	1 13/16		189.0	157.2	30.0	14.3	46.8	15.9	115.9	68.1	62.7	24.6	69.9		
HCFTS 210-30	1 7/8														
HCFTS 210-31	1 15/16		7 7/16	6 3/16	1.181	9/16	1 27/32	5/8	4 9/16	2 11/16	2.4688	.9685	2.7500	1/2	6.00
HCFTS 210-32	2 (s)														
HCFTS 211-55mm		55													
HCFTS 211-32	2		216.0	184.2	33.0	20.6	50.0	17.1	133.4	76.6	71.4	27.7	76.2		
HCFTS 211-33	2 1/16														
HCFTS 211-34	2 1/8		8 1/2	7 1/4	1.299	13/16	1 31/32	43/64	5 1/4	3 1/64	2.8110	1.0906	3.0000	9/16	9.00
HCFTS 211-35	2 3/16														

HCFTS 200 SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>



Two Bolt Flange Unit Eccentric Lock

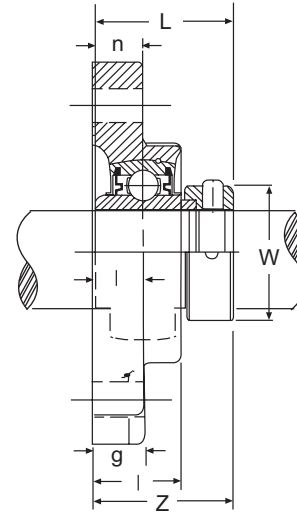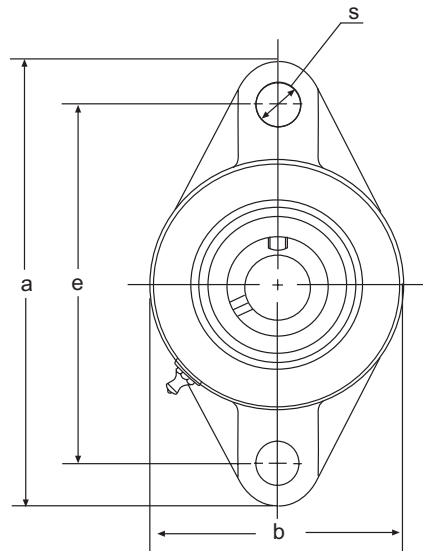

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)											Bolt Used	Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s ₂	b	Z	L	n	W	(in.)	
HCFTS 212-60mm		60	235.0	201.6	34.1	20.6	53.2	17.1	138.1	81.0	77.8	30.9	84.1		
HCFTS 212-36	2 1/4													9/16	9.90
HCFTS 212-37	2 5/16														
HCFTS 212-38	2 3/8		9 1/4	7 15/16	1 11/32	13/16	2 3/32	43/64	5 7/16	3 3/16	3.0630	1.2165	3.3125		
HCFTS 212-39	2 7/16														
HCFTS 213-65mm		65	247.7	210.3	38.1	22.2	58.7	20.6	151.6	89.7	85.7	34.1	86.0		
HCFTS 213-40	2 1/2		9 3/4	8 9/32	1 1/2	7/8	2 5/16	13/16	5 31/32	3 17/32	3.3740	1.3425	3.3858	5/8	12.00
HCFTS 213-41	2 9/16														
HCFTS 214-70mm		70	257.2	216.0	38.1	22.2	61.9	20.6	158.8	89.7	85.7	34.1	90.0		
HCFTS 214-42	2 5/8													5/8	13.00
HCFTS 214-43	2 11/16		10 1/8	8 1/2	1 1/2	7/8	2 7/16	13/16	6 1/4	3 17/32	3.3740	1.3425	3.5433		
HCFTS 214-44	2 3/4														
HCFTS 215-75mm		75	265.9	224.6	40.9	22.2	65.1	20.6	165.1	95.6	92.1	37.3	101.6		
HCFTS 215-45	2 13/16													5/8	15.00
HCFTS 215-46	2 7/8														
HCFTS 215-47	2 15/16		10 15/32	8 27/32	1 39/64	7/8	2 9/16	13/16	6 1/2	3 49/64	3.6260	1.4685	4.0000		
HCFTS 215-48	3														

HCFTS 200 SERIES




MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

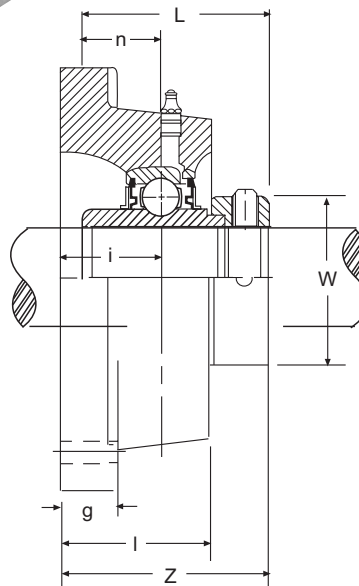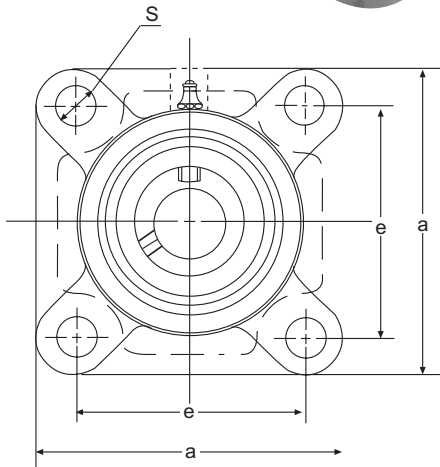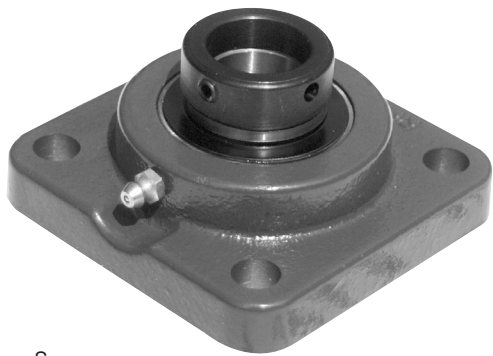

FOUR BOLT FLANGE UNIT ECCENTRIC LOCK

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used	Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s ₁	Z	L	n	W	(in.)	
HCFS 201-12mm	1/2 9/16 5/8 11/16	12	85.7	63.5	19.1	9.5	33.3	11.1	45.6	43.5	17.0	32.0	3/8	1.60
HCFS 202-15mm		15												
HCFS 203-17mm		17												
HCFS 201-08														
HCFS 202-09														
HCFS 202-10														
HCFS 203-11			3 3/8	2 1/2	.750	3/8	1 5/16	7/16	1 51/64	1.7126	.6693	1.260		
HCFS 204-20mm	3/4	20	85.7	63.5	20.5	9.5	33.3	11.1	47.2	43.5	17.0	32.0	3/8	1.76
HCFS 204-12			3 3/8	2 1/2	.807	3/8	1 5/16	7/16	1 55/64	1.7126	.6693	1.260		
HCFS 205-25mm		25	95.3	69.9	20.9	11.1	34.9	11.5	48.0	44.3	17.4	38.1		
HCFS 205-13	13/16 7/8 15/16 1		3 3/4	2 3/4	.826	7/16	1 3/8	29/64	1 57/64	1.7441	.685	1.500	3/8	2.31
HCFS 205-14														
HCFS 205-15														
HCFS 205-16														
HCFS 206-30mm	1 1/16 1 1/8 1 3/16 1 1/4 (s)	30	108.0	82.6	20.9	15.9	37.3	13.1	52.1	48.3	18.2	44.5	7/16	3.20
HCFS 206-17														
HCFS 206-18														
HCFS 206-19														
HCFS 206-20														
HCFS 207-35mm	1 1/4 1 1/4 1 5/16 1 3/8 1 7/16	35	117.5	92.1	23.0	12.7	38.1	13.1	55.2	51.1	18.8	55.6	7/16	4.19
HCFS 207-20														
HCFS 207-21														
HCFS 207-22														
HCFS 207-23														
HCFS 208-40mm														
HCFS 208-24	1 1/2 1 9/16	40	130.2	101.6	25.4	16.7	38.9	13.9	60.3	56.3	21.4	60.3	1/2	5.07
HCFS 208-25														
HCFS 209-45mm	1 5/8 1 11/16 1 3/4	45	136.5	104.8	25.4	18.3	39.7	15.9	60.3	56.3	21.4	63.5	1/2	5.95
HCFS 209-26														
HCFS 209-27														
HCFS 209-28														
HCFS 210-50mm	1 13/16 1 7/8 1 15/16 2 (s)	50	142.9	111.1	29.0	15.9	46.0	15.9	67.1	62.7	24.6	69.9	9/16	7.05
HCFS 210-29														
HCFS 210-30														
HCFS 210-31														
HCFS 210-32														

HCFS 200 SERIES


MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

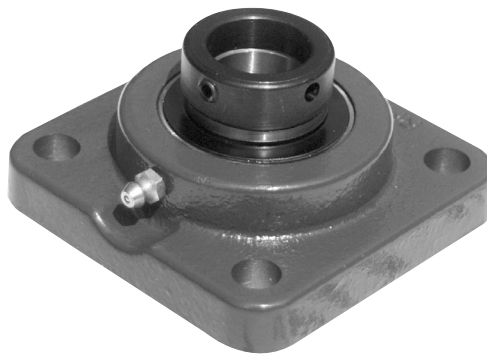

FOUR BOLT FLANGE UNIT ECCENTRIC LOCK

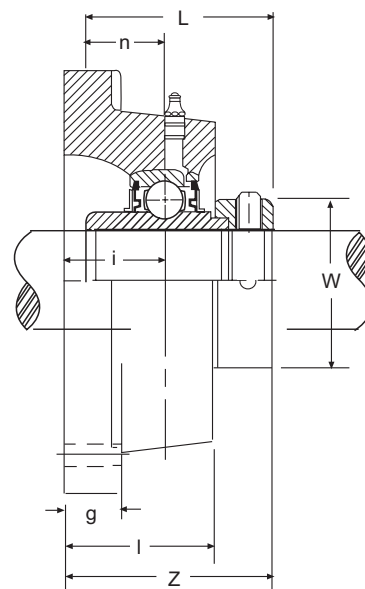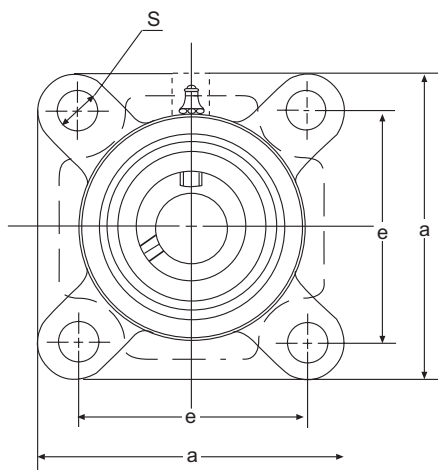

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used (in.)	Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s ₁	Z	L	n	W		
HCFS 211-55mm	2	55	161.9	130.2	32.0	17.5	50.0	17.1	74.6	71.4	27.7	76.2	5/8	9.26
HCFS 211-32														
HCFS 211-33														
HCFS 211-34														
HCFS 211-35														
HCFS 212-60mm	2	60	74.6	142.9	34.1	17.5	54.8	17.1	81.0	77.8	30.9	84.1	5/8	11.68
HCFS 212-36														
HCFS 212-37														
HCFS 212-38														
HCFS 212-39														
HCFS 213-65mm	2	65	187.3	142.9	38.1	22.2	58.7	20.6	89.7	85.7	34.1	85.3	5/8	13.00
HCFS 213-40														
HCFS 213-41														
HCFS 214-70mm	2	70	192.9	151.6	38.1	22.2	61.9	20.6	89.7	85.7	34.1	90.0	5/8	15.00
HCFS 214-42														
HCFS 214-43														
HCFS 214-44														
HCFS 215-75mm	2	75	200.0	158.8	40.8	22.2	65.1	20.6	95.6	92.1	37.3	101.6	5/8	17.00
HCFS 215-45														
HCFS 215-46														
HCFS 215-47														
HCFS 215-48														

HCFS 200 SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>



ALL STAINLESS STEEL PILLOW BLOCK SET SCREW LOCK

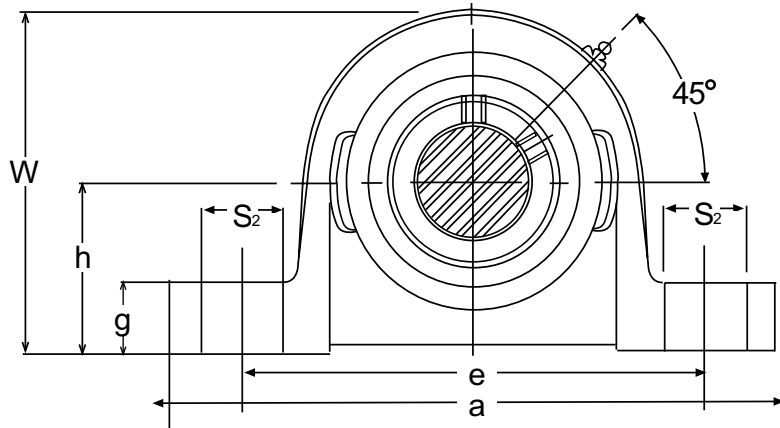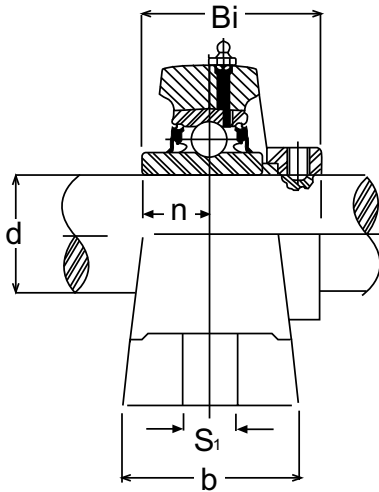

Part Number	Shaft Diameter (d)		Dimensions (in.) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	h	a	e	b	S2	S1	g	W	Bi	n	(in.)	(mm)	
SUCSP 204	3/4	20	33.3	127	95	38	19	13	13	65	31	12.7	3/8	M10	1.54
SUCSP 204-12			1 5/16	5	3 3/4	1 1/2	3/4	1/2	1/2	2 9/16	1.2205	0.5000			
SUCSP 205	1	25	36.5	140	105	38	19	13	15	71	34.1	14.3	3/8	M10	1.87
SUCSP 205-16			1 7/16	5 1/2	4 1/8	1 1/2	3/4	1/2	19/32	2 25/32	1.3425	0.5630			
SUCSP 206	1 3/16	30	42.9	165	121	48	20	17	17	84	38.1	15.9	1/2	M14	2.64
SUCSP 206-19			1 11/16	6 1/2	4 3/4	1 7/8	25/32	21/32	21/32	3 5/16	1.5000	0.6260			
SUCSP 206-20			1 1/4												
SUCSP 207	1 1/4	35	47.6	167	127	48	20	17	19	93	42.9	17.5	1/2	M14	3.74
SUCSP 207-20			1 7/8	6 9/16	5	1 7/8	25/32	21/32	3/4	3 21/32	1.6890	0.6890			
SUCSP 207-22															
SUCSP 207-23															
SUCSP 208	1 1/2	40	49.2	184	137	54	20	17	20	98	49.2	19	1/2	M14	4.62
SUCSP 208-24			1 15/16	7 1/4	5 13/32	2 1/8	25/32	21/32	25/32	3 27/32	1.9370	0.7480			
SUCSP 209	1 3/4	45	54	190	146	54	20	17	20	106	49.2	19	1/2	M14	5.28
SUCSP 209-28			2 1/8	7 15/32	5 3/4	2 1/8	25/32	21/32	25/32	4 3/16	1.9370	0.7480			
SUCSP 210	1 15/16	50	57.2	206	159	60	22	20	22	114	51.6	19	5/8	M16	6.38
SUCSP 210-31			2 1/4	8 1/8	6 1/4	2 3/8	7/8	25/32	7/8	4 31/64	2.0315	0.9685			
SUCSP 210-32			2												
SUCSP 211	2 3/16	55	63.5	219	171	60	22	20	22	125	55.6	22.2	5/8	M16	8.14
SUCSP 211-35			2 1/2	8 5/8	6 23/32	2 3/8	7/8	25/32	7/8	4 29/32	2.1890	0.8740			
SUCSP 212	2 7/16	60	69.8	241	184	70	25	20	25	138	65.1	25.4	5/8	M16	10.78
SUCSP 212-39			2 3/4	9 1/2	7 1/4	2 3/4	1	25/32	1	5 7/16	2.5630	1.000			

SUCSP 200 SERIES

MEYA BEARING CO., LIMITED



TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

ALL STAINLESS STEEL TWO BOLT FLANGE UNIT SET SCREW LOCK

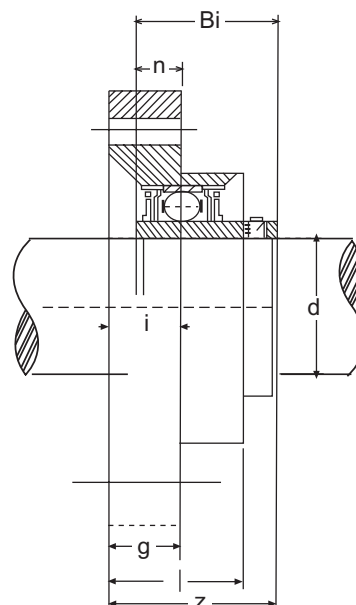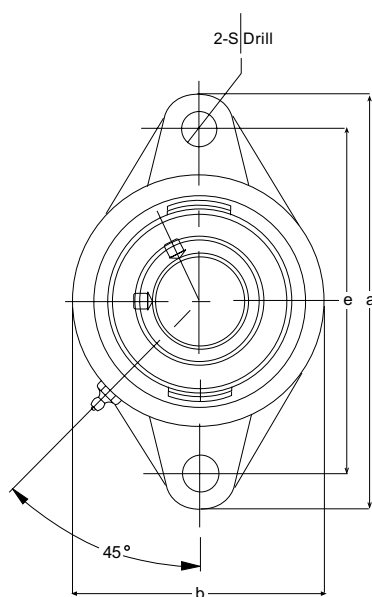

Part Number	Shaft Diameter (d)		Dimensions (in) or (mm)										Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	b	z	Bi	n	(in.)	(mm)	
SUCSFL 204		20	113	90	15	11	25.5	12	60	33.3	31	12.7		M10	1.04
SUCSFL 204-12	3/4		4 29/64	3 35/64	19/32	7/16	1	15/32	2 23/64	1 5/16	1.2205	0.5000	3/8		
SUCSFL 205		25	130	99	16	13	27	16	68	35.8	34.1	14.3		M14	1.39
SUCSFL 205-16	1		5 1/8	3 57/64	5/8	33/64	1 1/16	5/8	2 43/64	1 13/32	1.3425	0.5630	1/2		
SUCSFL 206		30	148	117	18	13	31	16	80	40.2	38.1	15.9		M14	1.87
SUCSFL 206-19	1 3/16		5 53/64	4 39/64	45/64	33/64	1 7/32	5/8	3 5/32	1 37/64	1.5000	0.6260	1/2		
SUCSFL 206-20	1 1/4														
SUCSFL 207		35	161	130	19	16	34	16	90	44.4	42.9	17.5		M14	2.64
SUCSFL 207-20	1 1/4														
SUCSFL 207-22	1 3/8		6 11/32	5 1/8	3/4	5/8	1 11/32	5/8	3 35/64	1 3/4	1.6890	0.6890	1/2		
SUCSFL 207-23	1 7/16														
SUCSFL 208		40	175	144	21	16	36	16	100	51.2	49.2	19		M14	3.52
SUCSFL 208-24	1 1/2		6 57/64	5 43/64	53/64	5/8	1 27/64	5/8	3 15/16	2 1/64	1.9370	0.7480	1/2		
SUCSFL 209		45	188	148	22	16	38	16	108	52.2	49.2	19		M14	4.18
SUCSFL 209-28	1 3/4		7 13/32	5 53/64	55/64	5/8	1 1/2	5/8	4 1/4	2 1/16	1.9370	0.7480	1/2		
SUCSFL 210		50	197	157	22	16	40	19	115	54.6	51.6	19		M16	5.06
SUCSFL 210-31	1 15/16		7 3/4	6 3/16	55/64	5/8	1 37/64	3/4	4 17/32	2 5/32	2.0315	0.7480	5/8		
SUCSFL 210-32	2														

SUCSFL 200 SERIES


MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555



E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>

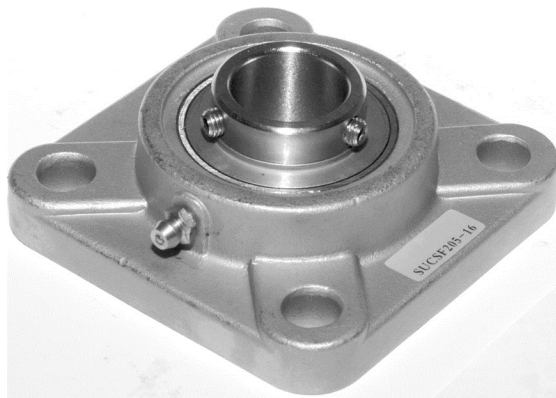

ALL STAINLESS STEEL FOUR BOLT FLANGE UNIT SET SCREW LOCK

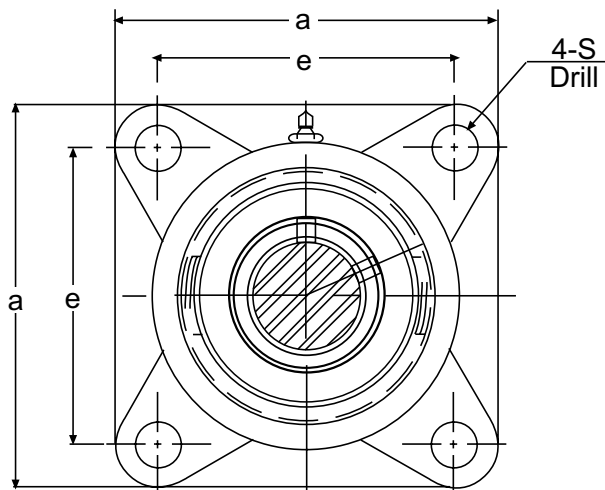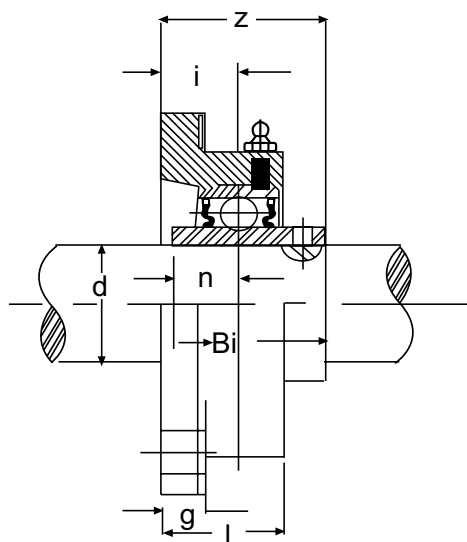

Part Number	Shaft Diameter (d)		Dimensions (in.) or (mm)									Bolt Used		Weight Lbs.
	(in.)	(mm)	a	e	i	g	l	s	z	Bi	n	(in.)	(mm)	
SUCSF 204		20	86	64	15	11	25	12	33.3	31	12.7		M10	1.32
SUCSF 204-12	3/4		3 3/8	2 1/2	19/32	7/16	1	15/32	1 5/16	1.2205	0.5000	3/8		
SUCSF 205		25	95	70	16	13	27	12	35.8	34.1	14.3		M10	1.90
SUCSF 205-16	1		3 3/4	2 3/4	5/8	1/2	1 1/16	15/32	1 13/32	1.3425	0.5630	3/8		
SUCSF 206		30	108	83	18	13	31	12	40.2	38.1	15.9		M10	2.42
SUCSF 206-19	1 3/16		4 1/4	3 1/4	45/64	1/2	1 7/32	15/32	1 19/32	1.5000	0.6260	3/8		
SUCSF 206-20	1 1/4													
SUCSF 207		35	117	92	19	15	34	14	44.4	42.9	17.5		M12	3.52
SUCSF 207-20	1 1/4													
SUCSF 207-22	1 3/8		4 19/32	3 5/8	3/4	19/32	1 11/32	35/64	1 3/4	1.6890	0.6890	7/16		
SUCSF 207-23	1 7/16													
SUCSF 208		40	130	102	21	15	36	16	51.2	49.2	19		M14	4.18
SUCSF 208-24	1 1/2		5 1/8	4 1/64	53/64	19/32	1 13/32	5/8	2 1/64	1.9370	0.7480	1/2		
SUCSF 209		45	137	105	22	16	38	16	52.2	49.2	19		M14	5.28
SUCSF 209-28	1 3/4		5 13/32	4 1/8	55/64	5/8	1 1/2	5/8	2 1/16	1.9370	0.7480	1/2		
SUCSF 210		50	143	111	22	16	40	16	54.6	51.6	19		M14	5.72
SUCSF 210-31	1 15/16		5 5/8	4 3/8	55/64	5/8	1 9/16	5/8	2 5/32	2.0315	0.9685	1/2		
SUCSF 210-32	2													
SUCSF 211		55	162	130	25	18	43	19	58.4	55.6	22.2		M16	7.70
SUCSF 211-35	2 3/16		6 3/8	5 1/8	63/64	23/32	1 11/16	3/4	2 5/16	2.1890	0.8740	5/8		
SUCSF 212		60	175	143	29	18	48	19	68.7	65.1	25.4		M16	9.24
SUCSF 212-39	2 7/16		6 7/8	5 5/8	1 9/64	23/32	1 7/8	3/4	2 23/32	2.5630	1.000	5/8		

SUCSF 200 SERIES

MEYA BEARING CO., LIMITED

TEL/WhatsApp: 0086-15966272020 0086-15265512555

E-mail: sales1@meyabearing.com sales2@meyabearing.com

Skype: mandybearing jasonforbearing

Website: <http://www.meyabearing.com>